

DATASHEET

XS4 Mini by SALTO

Stylish design is a SALTO trademark and with the XS4 Mini, we raise the bar on this already high standard thanks to its small, discreet size combined with a modern, clean LED aesthetic.

The Mini's smart compactness simplifies installation. Besides, it maintains the fire rating of the door as no additional drilling of the door is required.

www.saltosystems.com

TECHNICAL SPECIFICATIONS: XS4 MINI Sx15x

SALTO
inspired access



TECHNICAL DATA:

Reader dimensions (H x W x D):	127,0 x 58,5 x 22,5 mm
Weight	0,5 kg
Handle rotation:	Max. 45°
Door thicknesses:	35 mm - 100 mm
Square spindles:	8 mm
Power source:	3 AAA batteries (LR03 1,5V)
Number of openings:	40,000
Maximum events on lock audit	2 250 (SVN standalone mode) 1 850 (SVN BLUEnet mode) 1 450 (SALTO KS mode)
Temperature (without condensation):	+5 °C / +60 °C.
IP class:	Not suitable for outdoor use. Up to max. 80% humidity, non-condensing.
Certifications:	CE

ID TECHNOLOGIES:

MIFARE / DESFire:*	•
BLE Smart:	•
NFC:	•
Legic:**	—
HID iClass®:	•
Picopass:	—
i-Button:	—

* MIFARE® (DESFire EV2, Plus, Ultralight C, Classic).



** Legic Prime and Legic Advant

TECHNOLOGY PLATFORMS:**SALTO SPACE:**

Smile - Selfprogrammable	—
ROM:	•
SVN data-on-card:	•
SALTO RFnet:	—
SALTO BLUEnet:	•
SALLIS:	—

SALTO KS:

SALTO KS:	•
-----------	---

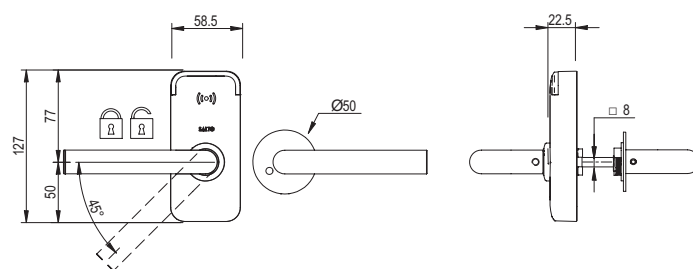TECHNICAL DRAWING:**HANDING REVERSIBLE****OPENING MODES:**

Standard:	•
Office mode:	•
Timed office:	•
Automatic opening:	•
Automatic opening + office	•
Toggle:	•
Timed Toggle:	•
Amok mode:	—
Exit leaves open mode:	•
Pin code / Keypad:	—

OPTIONS:**Reader colour:**

Black:	•
White:	•

Faceplate finish:

IM Satin stainless steel:	•
IP Bright stainless steel:	—
IA Antique brass:	—
PP PVD bright brass type:	—
PM PVD satin brass type:	•
NE Black chromium:	—
BC BioCote anti-microbial:	•


Handles

Compatible handles	U, L, W, E, T, S
--------------------	------------------

MODELS:


Sx150:

2 handles any type.

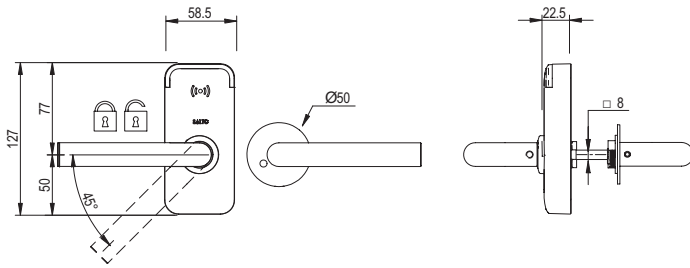

Sx151:


2 handles any type.
Inside thumbturn.

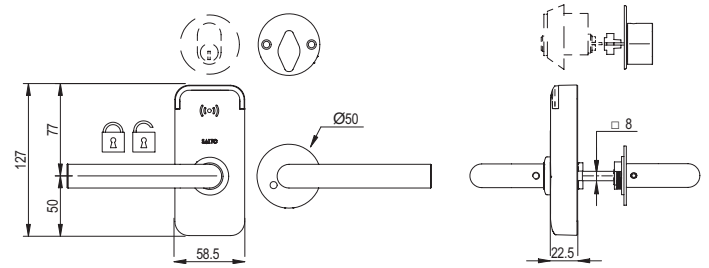

Sx154:


2 handles any type.
Inside plate.

- For mechanical emergency override.

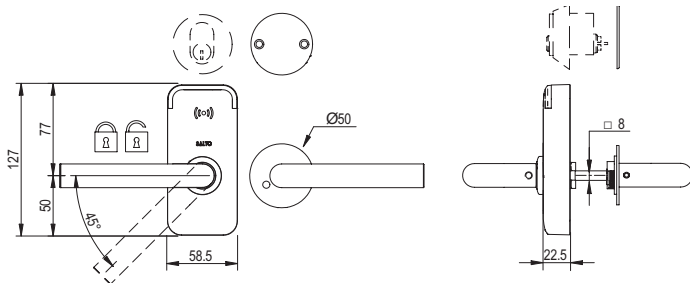


Sx160:

2 handles any type.
Outside built in cover plate and inside plate.

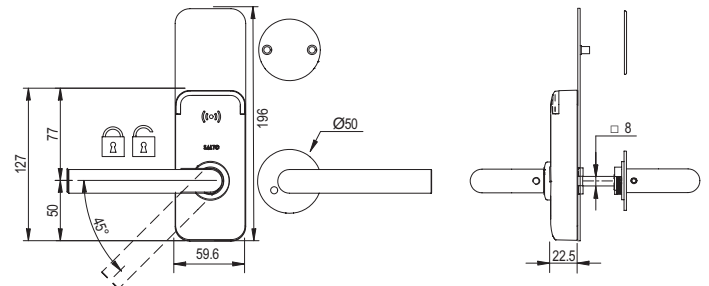


Sx161:

2 handles any type.
Outside built in cover plate and inside thumbturn.

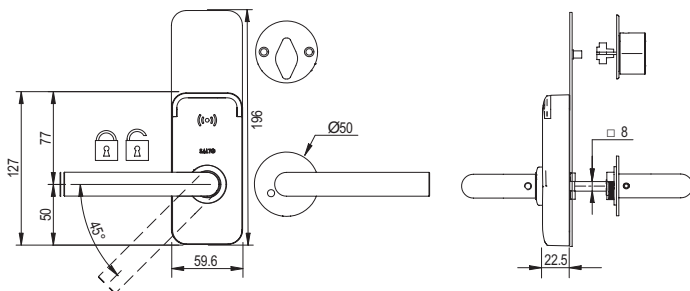

Sx170:

2 handles any type.
Outside and inside built in cover plate.

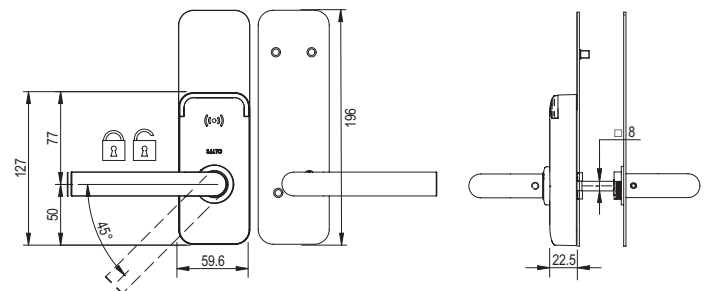

Sx171:

2 handles any type.
Outside and inside built in cover plate and inside thumbturn.

